

All-in-one Solar Charge Inverter


HF2430S60-100 (Max.Voc : 100V ; Rated input voltage : 220/230V)



Performance characteristics

- Load friendly: Stable sine wave AC output via SPWM modulation
- Supports a wide range of battery technology: GEL, AGM, Flooded, LFP, and program.
- Dual LFP battery activation method: PV&mains
- Uninterrupted power supply: simultaneous connection to utility grid/generator and PV
- Intelligent programming: the priority of the output from different energy sources can be set
- High energy efficiency: up to 99.9% MPPT capture efficiency
- Instant viewing of operation: the LCD panel displays data and settings ,while you can also be viewed using the app and webpage
- Power saving: power saving mode automatically reduces power consumption at zero-load
- Efficient heat dissipation: via intelligent adjustable speed fans
- Multiple safety protection functions: short circuit protection, overload protection, reverse polarity protection, and so on.
- under-voltage and over-voltage protection and reverse polarity protection.

Product characteristics

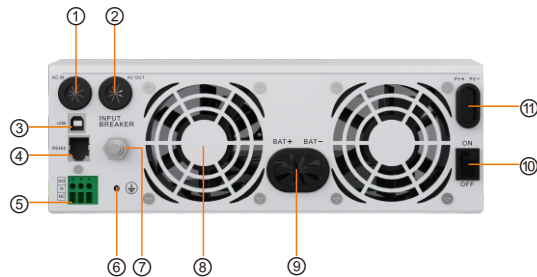

①	AC Input Port	⑧	Cooling Fan
②	AC Output Port	⑨	Battery Port
③	USB Communication Port	⑩	ON/OFF Rocker Switch
④	RS485 Communication Port	⑪	PV Input Port
⑤	Dry Contact Port	⑫	Light Touch Button
⑥	Grounding Screw Hole	⑬	Indicator Light
⑦	Mains Input Overload Protector	⑭	LCD Screen

Parameters

Model	HF2430S60-100	Adjustable
Battery Input		
Battery type	Sealed, Flood, GEL, LFP, Ternary	√
Rated Battery Input Voltage	24V (Minimum Startup Voltage 22V)	
Hybrid Charging Maximum Charging Current	140A	√
Battery Voltage Range	20Vdc~33Vdc ± 0.3Vdc(Undervoltage Warning/Shutdown Voltage/Overvoltage Warning/Overvoltage Recovery...)	√
Solar Input		
Maximum PV Open-circuit Voltage	100vdc	
PV Working Voltage Range	30-100Vdc	
MPPT Voltage Range	30-85Vdc	
Maximum PV Input Current	40A	
Maximum PV Input Power	1600W	
Maximum PV Charging Current	60A	√
AC Input(generator/grid)		
Mains Maximum Charging Current	80A	√
Rated Input Voltage	220/230Vac	
Input Voltage Range	UPS Mains Mode : (170Vac~280Vac)±2% APL Generator Mode : (90Vac-280Vac)±2%	√
Frequency	50Hz/ 60Hz (Automatic Detection)	
Mains Charging Efficiency	>95%	
Switch Time (bypass and inverter)	10ms(Typical Value)	
Maximum Bypass Overload Current	30A	
AC Output		
Output Voltage Waveform	Pure Sine Wave	
Rated Output Voltage (Vac)	230Vac (200/208/220/240Vac)	√
Rated Output Power (VA)	3000 (2600/2700/2850/3000)	
Rated Output Power(W)	3000 (2600/2700/2850/3000)	
Peak Power	6000VA	
On-load Motor Capacity	2HP	
Output Frequency Range(Hz)	50Hz±0.3Hz/60Hz±0.3Hz	√
Maximum Efficiency	>92%	
No-load Loss	Non Energy-saving Mode: ≤50W Energy-saving Mode : ≤25W (Manual Setup)	
General		
Certificate	CE(IEC 62109-1)	
EMC Certification Level	EN61000, C2	
Working Temperature Range	-15°C ~ 55°C	
Storage Temperature Range	-25°C ~ 60°C	
Humidity Range	5% to 95%(Conformal Coating Protection)	
Dimensions	378mm*280mm*103mm	
Weight (KG)	6.8	



Google browser, scan the QR code to download the APP

In the Google Play Store, search for "SmartESS" to download and install