

Wisdom Power

A New Era in Energy Storage


B-LFP51.2-200PW 51.2V 200Ah

The LFP 51.2V 200Ah Energy Storage Systems are a family family of 51.2V battery module s and accessories. The 51.2V family is designed as a drop-in replacement for similar sized lead-acid batteries offering twice the run-time and nearly half the weight. The 51.2V series is designed for lower voltage, lower power and longer run-time applications. They are built with LFP Technology that offers outstanding intrinsic safety and excellent float and cycle life resulting in low cost of ownership.

Feature

- Eco-friendly
- Lithium iron phosphate battery(LiFePO4)
- Currently the safest lithium technology
- Excellent resistance to abuse
- Less than 3% self discharging
- Maintenance-free, modular, and lightweight
- Up to 60% weight saving
- Battery monitoring storage history
- Built in safety protection
- Quality guaranteed
- 5-10 Years Warranty
- 15-18 Years Designed service life
- Available communication ports

Application



Safe

BSLBATT® batteries are based on Lithium iron battery technology (LiFePO4). This is the safest Lithium technology available today. On top of that our bespoke casing and electronics further increase safety and durability.

Technology

BSLBATT's BATTERIES do not contain lead LiFePO4 technology is an environmentally friendly way to store energy.


Wisdom Power delivers safe lithium phosphate energy storage solutions in standard lead-acid battery sizes for a wide variety of applications.





www.lithium-battery-factory.com

Wisdom industrial Power Co., Ltd

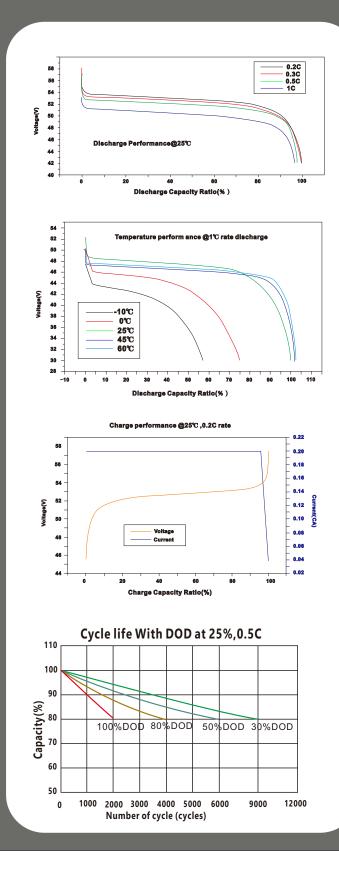



When it comes to reliability, our lithium batteries won't let you down. Contact your local distributor, visit www.lithium-battery-factory.com or talk to one of our Certified Wisdom Power.

Call International Calls: 0086 0752 2819469

ELECTRICAL SPECIFICATIONS	
Nominal Voltage	51.2V (16S)
Nominal Capacity	200AH
Energy	10.24KWH
Efficiency	99%
Self Discharge	<1% per Month
DISCHARGE SPECIFICATIONS	
Max. continus Discharge current	180A
Peak Discharge Current	180A
Recommend Discharge current	100A
Voltage at end ofDischarge	47-48V
TEMPERATURE SPECIFICATIONS	
Discharge Temperature	(-20~60℃)
Charge Temperature	(0~45℃)
Storage Temperature	(-20~55℃)

MECHANICAL SPECIFICATIONS		
Dimensions (L x W x H)	490*147*820MM	
Weight	95KG	
Case Material	Steel	
Cell Type	Prismatic	
Chemistry	LiFePO4	
CHARGE SPECIFICATIONS		
Recommended Charge Current	50A	
Maximum Charge Current	50A	
Recommended Charge Voltage	54-55V	
	1 	
COMPLIANCE SPECIFICATIONS		
Certifications	CE (battery)	
	UN38.3 (battery)	
	ROHS2.0 (cells)	
Shipping Classification	UN 3480, CLASS 9	

www.lithium-battery-factory.com

Certifications Applicable to the Design and Manufacture of Lithium Iron Phosphate Batteries

